



1 PREPARE 2 TREAT 3 MAINTAIN

ADVANCED 2K FINISH



resistance

Extreme resistance

Robust surface with extremely high resistance to black heel marks, scratches, spills and stains. Use hardener for increased strength. Ideal for high traffic commercial spaces.



6h

Fast drying

Dry in 6 hours for light use / fully hardened in 5 days and ready for cleaning with water.



eco

Indoor climate labelled

Ensures a good working environment during application. Does not harm indoor air quality. Isocyanate free.



maintain

Easy to maintain

No special tools required. Just use the standard WOCA system.

APPLICATION AREA

Advanced 2K Finish is for new, untreated, sanded and finished wood, or as top coat on WOCA oil. Ideal for all species of wood.

The finish is particularly suitable for high traffic commercial areas due to high durability and easy maintenance.

RESULT

Advanced 2K Finish ensures an extremely robust surface with extra high resistance to black heel marks, scratches, spills and stains.

The water-based Advanced 2K Finish is indoor climate approved and thus assures a good working environment during application, as well as a comfortable indoor climate afterwards.

Product information

Coverage: 425-550 SF/5 L container
Packaging: 5 L
Available in Matt and Silk-matt





HOW TO...

...DO THE BASIC TREATMENT OF WOODEN FLOORS

Tools

The finish is preferably applied with a 3/8" nap roller or similar.

Preparation

The floor must be free of dirt, grease, wax and sanding residue. Floors that have been previously finished must be cleaned with WOCA Intensive Wood Cleaner before being sanded matt. Vacuum thoroughly and wipe the floor down afterwards if necessary, using a tightly-wrung water-soaked cloth.


It is important that both wood and finish have a temperature of min. 59°F (preferably around 68°F) and air humidity of approx. 50 %. Make sure that the room is well-ventilated for optimal evaporation and drying time.

Please note

Do not expose the floor to water or clean it for the first 5 days while the finish is hardening.

Maintenance and cleaning

For regular cleaning, we recommend using WOCA Vinyl Laminate and Finish Soap. Maintain the surface with WOCA Vinyl Laminate and Finish Care.

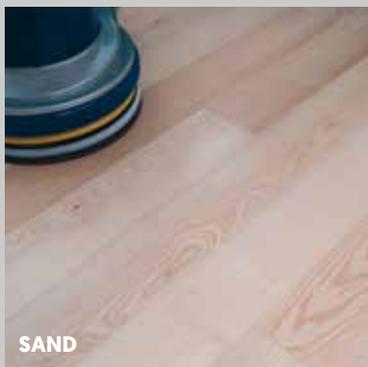

INSTRUCTIONS

- UNTREATED OR SANDED SURFACES

- 1 Final sanding must be done with grit 120. Vacuum carefully and wipe surface with a cloth hard wrung in clean water. The surface must be completely dry before proceeding.
- 2 Apply WOCA Base Primer with a roller or brush and leave the surface to dry.
- 3 Apply a coat of Advanced 2K Finish without hardener and leave the surface to dry until next day.
- 4 Sand the surface with grit 150-200 and vacuum carefully.
- 5 Mix WOCA 2K Hardener with the finish and shake thoroughly. Leave the mixture for ten minutes before use.
- 6 Apply the final coat of Advanced 2K Finish.

- REFINISHING FINISHED SURFACES

- 1 Wash the surface with WOCA Intensive Wood Cleaner.
- 2 Sand the wood with grit 120-150 and vacuum carefully.
- 3 Mix WOCA 2K Hardener with the finish and shake thoroughly. Leave the mixture for ten minutes before use.
- 4 Apply to coats of finish. Allow a drying time of 2-4 hours between the coats.

The newly-finished floor can be used with caution the following day.